



# American Bureau of Shipping

Certificate N°:  
SQ7021710-40

## UN Portable Tank/Tank Container Initial Certificate

Owner & address	<u>Falcon Lease Pte Ltd</u>	Owner No.: <u>FLNU 602310-6</u>
Manufacturer & address	<u>Jing Jiang Asian-Pacific Logistics Equipment Co., Ltd</u> <u>No. 199 Xingang Avenue, JingJiang City, Jiangsu Province, China</u>	Serial No.: <u>2502235</u>
Manufacturer's Model N°: <u>A023E-026-0002</u>		

### APPLICABLE RULES, REGULATIONS AND STANDARDS

ABS Design Type N°: <u>AB/124/22</u>	Customs Approval Reference: <u>USA/124-AB/22</u>
ABS Approval Ref. N°: <u>WO0294657</u>	International Union of Railways (UIC): <u>IRS 50592</u>
CSC Approval Reference: <u>USA/AB-124/22</u>	IMDG Approval Reference: <u>USA/IMO/AB/124/22</u>
US DOT Identification Code: <u>IA-8101</u>	Sec. 6.7 ADR/RID Approval Number: <u>NL/AB-124/22</u>
US DOT Approval: 49 CFR <u>§178.273, §178.274, §178.275</u>	Sec. 6.8 ADR/RID Approval Number: <u>NL/AB-124/22</u>
US DOT SP: <u>N/A</u> and/or TC Equiv.Cert.: <u>N/A</u>	Other(s): <u>TC, ISO 668, 1161, 6346, 1496-3</u>

### CONTAINER CHARACTERISTICS

ISO Size/Type Code: <u>22K2</u>	Width: <u>2438</u> mm	Height <u>2591</u> mm
Overall Length: <u>6058</u> mm	Tare: <u>3730</u> kg	Max. Permissible Payload: <u>32270</u> kg
Maximum Operating Gross Mass: <u>36000</u> kg	Allowable Stacking Load for 1.8 g: <u>213360</u> kg	Transverse Racking Test Force: <u>150000</u> newtons

### TANK CHARACTERISTICS

Design Code: <u>ASME SECT. VIII Div. 1 &amp; EN14025</u>	Liquid Capacity at 20°C: <u>25950</u> liters (total)	
Overall Tank Length: <u>6029</u> mm	Outside Tank Diameter: <u>2423</u> mm	
Head Matl Spec.: <u>SANS 50028-7:1.4402</u>	Head Thickness: <u>4.6</u> mm (as built after forming)	Head Corrosion Allowance: <u>0.2</u> mm
Shell Matl Spec.: <u>SANS 50028-7:1.4402</u>	Shell Thickness: <u>4.6</u> mm (as built)	Shell Corrosion Allowance: <u>0.42</u> mm
Equiv. Reference Steel Thickness: <u>6</u> mm	MAWP: <u>4.0</u> bar	MAWP of Heating System: <u>4.0</u> bar
External Design Pressure: <u>0.41</u> bar	Design Temperature Range: Min.: <u>-40</u> °C; Max.: <u>130</u> °C	Insulation: Type: <u>Rockwool</u> & Thickness: <u>50</u> mm
Coating/Lining: Type: <u>N/A</u> & Thickness: <u>N/A</u> mm	Baffles: <u>N/A</u> Quantity: <u>N/A</u>	Cladding: Type: <u>GRP</u> & Thickness: <u>1.8/2.0</u> mm
Discharge: <u>Bottom</u>	Bottom Discharge No. of Closures in Series: <u>3</u>	

### PRESSURE RELIEF DEVICES

	1 <sup>st</sup> ; Quantity: <u>1</u>	2 <sup>nd</sup> ; Quantity: <u>N/A</u>	3 <sup>rd</sup> ; Quantity: <u>N/A</u>
Manufacturer	<u>PEROLO</u>	=	=
Catalog Number	<u>MX65F44TSP</u>	=	=
Set Pressure	<u>4.4</u> bar	= bar	= bar
Rupture	<u>N/A</u> bar	= bar	= bar
Capacity (each)	<u>4.032</u> m³/s	= m³/s	= m³/s
Total Capacity: <u>4.032</u> m³/s			

### SERVICE EQUIPMENT

2.5" Safety Relief Valve, 1.5" Air Line, 3" Bottom Discharge.

### TESTING INFORMATION

Prototype Test Certificate: <u>SQ5160313-A.R2</u> , dated: <u>04-Jan-2024</u>	Rail Impact Test Certificate/Report: <u>SQ5038404-A</u> , dated: <u>21-Jan-2022</u>
TC Impact Approval: <u>Yes</u>	

### PRESSURE TEST

Test Pressure of Tank: <u>6.0</u> bar, dated: <u>29-May-2025</u>	Test Pressure of Heating System: <u>6.0</u> bar, dated: <u>28-May-2025</u>
Leak Proof Test of Container: <u>1.0</u> bar, dated: <u>30-May-2025</u>	

Approved Commodities: Compatibilities commodities as per T11/L4BN

Portable Tank Instruction: T11

ADR/RID Tank Code: L4BN

Marking: 29/05/2025 P AB

CSC Plate Stamping Date: 05/2030 or ACEP N°: N/A

Stamping tank-plate


Next Inspection Date: 11/2027

Additional Information/Comments: The compatibilities between commodities and service equipment/pressure relief devices/vessel/gaskets are the responsibility of the owner. Shipping name/special provisions markings are the responsibility of the owner.

Issued on: 07-Jun-2025 at Jingjiang, Jiangsu, China by Wang Yuanhao (Empl. No. 76000)

Field Office: Shanghai, China

Request Reviewed and NO Conflict of Interest Identified.

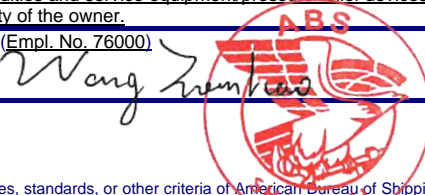

NOTE: This Certificate evidences compliance with one or more of the Rules, guides, standards, or other criteria of American Bureau of Shipping and is issued solely for the use of the Bureau, its committees, its clients or other authorized entities. This Certificate is a representation only that the Container(s) specified herein has been found to comply with one or more of the Rules, guides, standards, or other criteria of American Bureau of Shipping. The validity, applicability and interpretation of this Certificate is governed by the Rules and standards of American Bureau of Shipping who shall remain the sole judge thereof. Nothing contained in this Certificate or in any Report issued in contemplation of this Certificate shall be deemed to relieve any designer, builder, owner, manufacturer, seller, supplier, repairer, operator, or other entity of any warranty express or implied.